
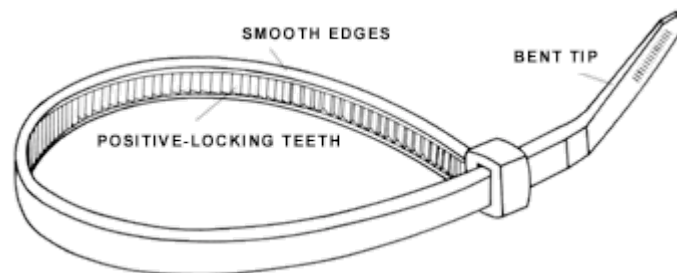


CT Nylon Cable Ties

Our ties meet most basic cable tie needs, with choices covering a wide range of requirements for size and strength. One-piece, injection molded construction provides maximum strength and adjustability for securing all sizes of bundles. Extra features such as rounded edges and bent-tip design make installation easy, fast, accurate, and secure.

Split mandrel, loop tensile strength tests show that the most vulnerable stress point for a nylon cable ties is its pawl. There is a trade-off between insertion / pull-up ease and strength of a cable tie. The stronger the pawl, the more force is required to insert and pull up the strap as it engages the pawl teeth. Cable ties are designed to optimize insertion ease and still meet or exceed all applicable strength requirements. This magnified cross-section illustrates our full four-tooth locking engagement between strap and pawl under load. This intimate contact between pawl and strap teeth ensures that the strength of the pawl is fully utilized.

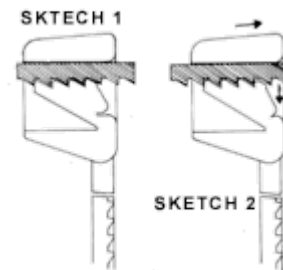

CONFORMANT STANDARDS:

- Made to comply with MIL-S M20693B, Strength Exceeds MIL-S 23190E
- MATERIAL : UL Approved Nylon 6/6, UL 94V-2

GENERAL PROPERTIES :

- COLOR : Natural, Black
- Material: UL approved Nylon 6/6

- TEMPERATURE : -40deg C ~ 85deg C
- REMARKS : Complete Range, Stable Quality, Low Insertion
- Flammability: UL 94V-2

Red2go Part Number	Color	L mm (in.)	W mm (in.)	MAX. DIA. mm	MIN. STRENGTH kg (lbs.)	PACKING
CT100N	Natural	100 (4.0")	2.5 (.10")	21	8 (18)	100 pcs/ per bag
CT100B	Black	100 (4.0")	2.5 (.10")	21	8 (18)	100 pcs/ per bag
CT150N	Natural	150 (5.9")	3.6 (.14")	36	18 (40)	100 pcs/ per bag
CT150B	Black	150 (5.9")	3.6 (.14")	36	18 (40)	100 pcs/ per bag
CT200N	Natural	200 (8.0")	4.8 (.19")	54	22 (50)	100 pcs/ per bag
CT200B	Black	200 (8.0")	4.8 (.19")	54	22 (50)	100 pcs/ per bag
CT290N	Natural	288 (11.3")	4.8 (.19")	81	22 (50)	100 pcs/ per bag
CT290B	Black	288 (11.3")	4.8 (.19")	81	22 (50)	100 pcs/ per bag
CT370N	Natural	368 (14.5")	4.8 (.19")	106	22 (50)	100 pcs/ per bag
CT370B	Black	368 (14.5")	4.8 (.19")	106	22 (50)	100 pcs/ per bag
CT370NHD	Natural	370 (14.5")	7.6 (.30")	106	54 (120)	100 pcs/ per bag
CT370BHD	Black	370 (14.5")	7.6 (.30")	106	54 (120)	100 pcs/ per bag
CT540BHD	Black	542 (21.3")	7.6 (.30")	157	54 (120)	100 pcs/ per bag
CT700NHD	Natural	709 (27.9")	8.8 (.35")	185	79 (175)	100 pcs/ per bag
CT700BHD	Black	709 (27.9")	8.8 (.35")	185	79 (175)	100 pcs/ per bag



The above information corresponds to our actual knowledge and are according to our knowledge is rendered correct and reliable. But they do not represent binding properties. Customers and end-users have to decide autonomously about application in the provided range. Under no circumstances is Red2go Pty Ltd liable for any eventual, indirect or consequential damages arising from the sales, resales, transfer, use or misuse of the product. Our Liabilities are limited to only in replacing products due to manufacturing defects.